
our product

Air Compressing AC Spot Welder

Light and handy desktop type, unique pressurizing mechanism, accurate adjustment of pressure speed. Welds are not liable to deforming under high pressure.


Control with computer IC circuit supported by power voltage fluctuant compensating circuit. Adoption of high-power import SCR contactless switch for the primary circuit, long using life of thyristor with stable output power.

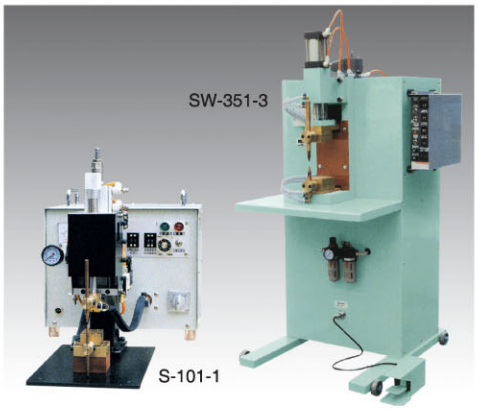

Apply to

Suitable for the welding of hardware parts, copper wire, electrical switch, panel and fine line.

Welding of wire mesh product, computer casing, automotive parts, office furniture, kitchen utensil, switchbox, stainless steel pan, vent pipe and housing of electric appliances.

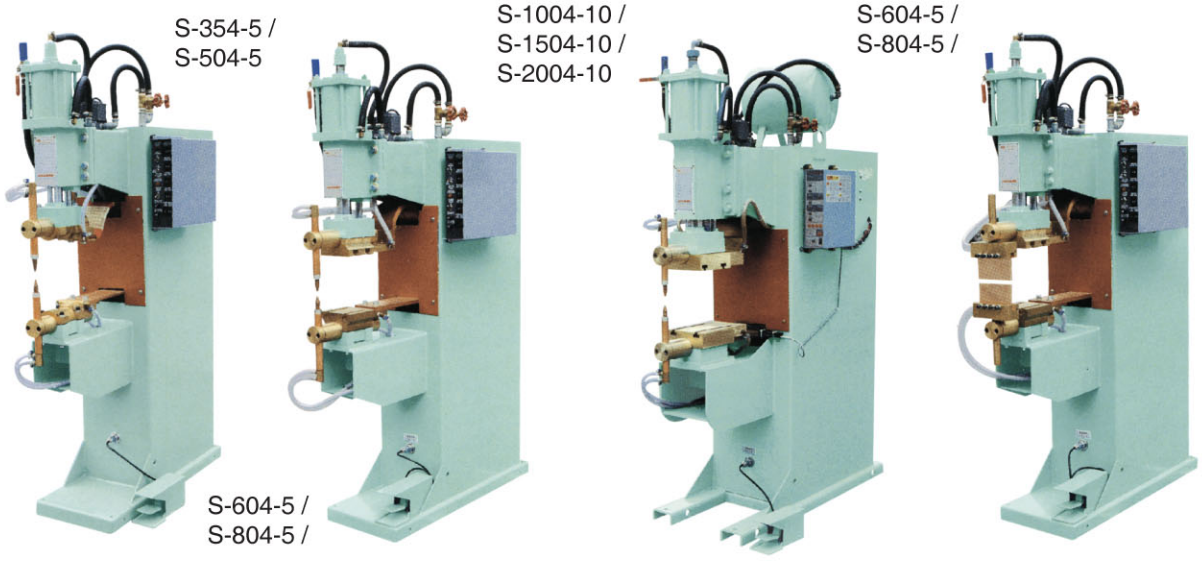

Model	Rated Capacity	Power voltage	Rated Frequecy	Rated input	Short Circuit	Electrode Force	Duty Cycle	Throat mensions		Cooling Water Flow	Machine Weigh	Machine dimension L x W x H	Welding Capability Low carbon steel
								Opening	Depth				
	KVA	V	HZ	KVA	A	Kg	%	mm	mm	l/min	kg	mm x mm x mm	mm+mm
S-354-5	35	200 400	50/60	85	16000	500	10	170	250	6	308	1000 x 500 x 1660	2.5+2.5
S-504-5	50	200 400	50/60	129	20000	500	10	170	250	6	320	1000 x 500 x 1660	2.8+2.8
S-604-5	60	200 400	50/60	145	22000	500	9.0	270	500	6	335	1000 x 500 x 1660	3.0+3.0
S-804-5	80	200 400	50/60	161	25000	500	8.2	270	500	6	385	1000 x 500 x 1660	4.0+4.0
S-1004-10	100	200 400	50/60	324	35000	1000	6.5	300	500	10	630	1150 x 570 x 1860	4.5+4.5
S-1504-10	150	200 400	50/60	445	42000	1000	5.5	300	500	10	700	1250 x 670 x 1860	5.0+5.0
S-2004-10	200	200 400	50/60	620	50000	1000	5.0	300	500	10	800	1250 x 700 x 1860	6.0+6.0
S-101-1	10	220	50/60	20	3500	100	10	50	170		42	600 x 350 x 430	0.6+0.6
SW-351-3	35	200 400	50/60	70	12000	300	10	180	170	6	200	800 x 600 x 1420	2.0+2.0